Chinducs

Multi-zone Induction Buffet Warmer

- Full area heating, no blind spots
- Each heating zone has 9 induction coils
- High temperature limit safety, default control temperature range 45~92℃
- Fully welded and polished edges for hygiene purpose

CAUTION

Incorrect installation or inadequate ventilation will affect the performance and durability of all build-in models.

PB5000

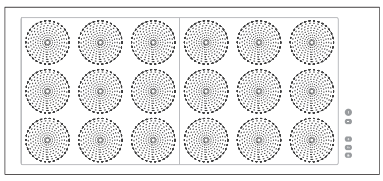

PB7500

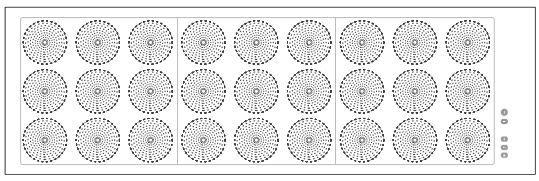

Model	Size(mm)	Voltage	Power	Cutout Opening – External (for ceramic glass) (mm)	Cutout Opening - Internal (for equipment body) (mm)
PB5000	800×380×72	220V ~50-60Hz	2.5kW×2	804×384×7.5	765×355
PB7500	1180×380×72	220V ~50-60Hz	2.5kW×3	1184×384×7.5	1135×355

Chinducs

ADD: No.168, Huanghai Avenue, Economic and Technology Development Zone, Lianyungang, Jiangsu Province, China

TEL: +86 132 6130 7927

FAX: +86 0518-81088031

E-mail: service2@chinducs.cn

- Control: touch panel
- Display: LED
- SUS 304 stainless steel structure
- The buffet warmer is generator integrated with inductive coils as one piece - easy installation and service/repair, giving spacious sub-cabinet for other usage.
- Automatic shut off after idle for 10 minutes
- Automatic shut off after 480 minutes continuous working
- Material compatibility detector - Yes
- 6-level power control
- 9-ring coil per heating hob (400x400mm)
  Better sensitivity and efficient heating (uses minimum 10cm diameter pot)
- 6mm thickness of EuroKera® ceramic glass hob
- Independent power supply for each heating zone